

5. FORESTRY

5.1 Introduction

This chapter provides an assessment of the significance of predicted residual effects on forest and woodland areas arising from the construction and operation of the proposed new An Suidhe Substation and accompanying infrastructure located within the site boundary, also known as the 'Red Line Boundary' (RLB) (hereby referred to as 'the Proposed Development') and the associated Inveraray to Crossaig Reinforcement overhead line (OHL) tie-in operational corridor (OC) (hereby referred to as 'the Associated Development'). These two developments are together known as 'the Project'.

Annex I contains a Woodland Report which describes the woodland baseline conditions in the area of the Project, the potential windthrow risk, the short and long term potential impacts on commercial woodland, mitigation measures proposed and an assessment of the required area for compensatory planting. This chapter is also supported by **Figures 5.1-5.4** which form part of the Annex along with the Compensatory Planting Management Strategy.

5.2 Objectives

The baseline purpose of this chapter is to:

- Describe the assessment methodology and significance criteria used in completing the impact assessment;
- Describe the potential direct and indirect effects on forestry resources associated with the Project;
- Describe the cumulative effects on the forestry resources associated with the Project;
- Describe the mitigation measures proposed to address the likely significant effects; and
- Assess the residual effects remaining following the implementation of mitigation.

The forestry landscape assessment and baseline surveys informing this Chapter have been carried out by Scottish Woodlands Ltd, in line with the UK Forestry Standard (UKFS)¹ guidance.

5.3 Guidance

The following sources have been used to obtain information:

- An Suidhe Substation Woodland Report;
- UKFS Guidelines;
- Argyll and Bute Woodland and Forest Strategy; and
- Site walkover surveys conducted in April and May 2022.

5.4 Methodology

Scope of the Assessment

This chapter considers the significance of likely predicted effects of the Project on forestry, including cumulative assessment is based on the felling requirements identified for the Project as proposed by the Applicant. It defines the potential impacts on the forest structure and management of the resource, and the likely level of impact based on an assessment of the sensitivity of the affected forestry areas which may arise as a result of the Project but does not address the Long-Term Forest Plans (LTFPs) of the wider resource (outside the area identified for the Project within the Red Line Boundary, known as 'the RLB'). Any felling undertaken outside the RLB would be

¹ Forestry Commission (2017) https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/687147/The_UK_Forestry_Standard.pdf

at the discretion of the landowner, and the Applicant would not have any control over this. Consequently, this assessment is limited to consideration of the effects of the Project on the present forest composition and yield.

Extent of the Study Area

The study area for this assessment is based around the requirement to form and maintain an Operational Corridor (OC) for the Associated Development and the requirement to fell forestry within the RLB to allow for construction of the substation and these areas have been identified by the Applicant based on requirements for construction, maintenance and operation of the Project, and any site constraints identified. As provided in terms of the the Electricity Safety, Quality and Continuity Regulations (ESQCR) 2002 and Schedule 4 to the Electricity Act 1989, the Applicant has the necessary statutory powers to remove woodland for the purposes of construction and ongoing maintenance of new overhead lines and to ensure clearance and protection of electrical infrastructure and equipment.

The OCs for OHLs are defined with reference to the distance at which a tree could fall and cause damage to the OHL, resulting in a supply outage. As a result, the final OC width would be based on the safety distance required to allow for a mature tree falling towards the OHL at the mid point of an OHL span between two towers taking into consideration key factors such as gradient, topography, and crop height. The OC for a 275kV line (as is proposed in this case) is usually set to a width of 85 m. However, where going through valuable habitat such as ancient and/or native woodland, it can, depending on the tree species present, be reduced to ensure the retention of as many trees as is reasonably practicable.

Sensitivity, Magnitude and Significance of Effect

There are currently no published criteria, guidance or methodologies for the assessment of effects on forestry. As a result, the assessment is made based on professional judgement, with reference to:

- The sensitivity of the different types of woodland present in the study area, taking into consideration the degree and rate of change in the woodland, both in the recent past and that anticipated in the near future, and therefore the susceptibility/vulnerability of the woodland change; the quality of the woodland and the extent to which it is rare or distinctive, and the value attributed to the woodland through designations;
- Magnitude of change and extent of woodland removal;
- Duration and reversibility, i.e., the timescale of the effect of the Project (days/weeks/months/years) until recovery. Permanent effects are described as such, and likelihood of recovery is detailed where appropriate; and
- Adverse/beneficial, i.e., an assessment of whether the effects of the Project will be beneficial or detrimental to the feature in question.
- The effect of tree felling on woodland is normally considered to be of an adverse nature, however, in some areas beneficial effects may arise where the introduction of the Project allows for the removal of ecologically habitat-poor conifer plantation.

The criteria for assessing sensitivity and magnitude are outlined in Tables 5.1 and 5.2 below, while Table 5.3 outlines the methodology for calculating the significance of the effect.

Table 5.1 Criteria for assessing sensitivity.

Category	Description
High	Highly valued, subject of national designation, e.g. Ancient Woodland Category 1a; Particularly rare or distinctive in a national context; or Considered susceptible to small changes.
Medium	Valued more locally, subject to local designation; Rare or distinctive in a regional context; and/or

	Tolerant of moderate levels of change.
Low	Generally, more commonplace and not designated; Considered potentially tolerant of noticeable change; or Undergoing substantial development such as that their character is one of change.
Negligible	Already fundamentally changed (e.g. second rotation commercial conifer); Considered tolerant of noticeable change; or Having undergone substantial development such that their character is one of change.

Table 5.2 Criteria for assessing magnitude of change

Category	Description
High	A noticeable change to the woodland over a wide area or an intensive change over a limited area.
Medium	Small changes to the woodland over a wide area or noticeable change over a limited area.
Low	Very small changes to the woodland over a wide area or small changes over a limited area.
Negligible	No discernible change to the woodland.

Table 5.3 Criteria for calculating the significance of effects.

Magnitude of Change ↓	Sensitivity of Woodland →			
	High	Medium	Low	Negligible
High	Major	Major	Moderate	Minor
Medium	Major	Moderate	Minor	None
Low	Moderate	Minor	None	None
Imperceptible	Minor	None	None	None

Baseline Data Collection (Desk Study)

The Proposed Development RLB and the Associated Development OC, the surrounding forestry and landscape, and the existing and proposed new access tracks (see **Figures 5.1 and 5.2**) were analysed for existing woodland cover through desk-based studies using maps and aerial photography. Web-based data on local, regional and national designations and public access issues were also consulted.

Forest Walkover (Field Survey)

Forest walkover and mapping surveys were undertaken in April and May 2022, to confirm the extent of the woodland areas affected by the Project and to further assess the current woodland characteristics and the wider impacts the developments would have on the woodland resource. Photographic records were captured to provide visual samples of the woodland types and evidence of woodland characteristics throughout the RLB, see the

accompanying Woodland Report in **Annex I**. An estimate of standing woodland volume of the commercial conifer resource was calculated during the forest walkover survey, see the accompanying Woodland Report in **Annex I**.

The forest walkover survey also included a visual assessment of tree health, vigour, ground conditions and existing woodland stability. Observations were also made of potential woodland windfirm boundaries, investigating the RLB, forest rides and other potential green edges as identified during the baseline desk survey.

Limitations and Assumptions

Consultation with the landowner on their Land Management Plans (LMPs) is ongoing in association with the woodland removal proposals of the Project.

5.5 Results

Baseline

The Proposed Development is located within a commercial conifer plantation with a RLB area of 7.43 ha of mainly conifer thicket and recent restock with integrated open ground. The Inveraray to Crossaig Reinforcement 275kV overhead line, recently completed by the Applicant, currently connects to the existing An Suidhe substation approximately 500m south of the Proposed Development and the line will be realigned as part of the Associated Development to connect to the new substation. An 85 m wide wayleave corridor will be felled through the commercial conifer plantations to accommodate the proposed alignment, and 20m wide corridors will be cut to facilitate construction of new access tracks.

The RLB area covers a total of 7.43 ha RLB, of which 3.86 ha is classified as woodland. This woodland area includes 0.13 ha of native broadleaved trees which will be retained wherever possible. The remaining 3.73 ha of woodland requires to be clear felled to facilitate the construction of the Proposed Development.

The Associated Development covers a woodland area of 6.67 ha which requires to be clear felled to facilitate the construction of the OHL alignment and the permanent access track (see **Figures 5.1** and **5.2**).

A detailed breakdown of woodland characteristics and woodland removal requirements can be found in the An Suidhe Substation Woodland Report (**Annex I**).

A single primary landowner, Forestry and Land Scotland (FLS) was identified and communication will remain ongoing throughout the project.

Field Survey

Age classes vary throughout the conifer plantations on site, with 2-3-year-old Sitka spruce *Picea sitchensis* and pine mix on mounded replanted land within, and directly south of the development site. Immediately south-east of the realignment corridor, bordering the existing access track, is an area of pre-thicket of approximately 6-8 years. Within this area, the principal tree species is Sitka spruce of variable age class and growth rates. The ground conditions are wet and boggy in areas across the RLB site, which has impacted tree growth rates and created 'checked' Sitka spruce (areas of poor quality/stunted growth timber) (see **Figures 5.1** and **5.2**).

To the northeast of the development site and encompassing the north-eastern part of the proposed realignment corridor, lies a deer fenced plantation of 10-year-old Douglas fir *Pseudotsuga menziesii* and Scots pine *Pinus sylvestris*, with silver birch *Betula pendula*, willow *Salix* sp. and rowan *Sorbus aucuparia* regeneration present. This crop is of fairly poor quality due to wet ground conditions and exposure to browsing. On the drier, elevated sloped ground to the west and southwest of the Proposed Development (outside the RLB) lies a semi-mature (30-35-year-old), un-thinned Sitka spruce plantation of approximately 12.97 ha. This area is connected to and forms part of a larger Sitka spruce woodland block. Wet, peaty pockets are evident and as a result timber quality varies throughout (see **Figures 5.1** and **5.2**).

The watercourse Allt Tom a' Challtuinne runs northwest of the proposed development. The field survey revealed an established riparian corridor with mainly silver birch and alder *Alnus glutinosa* along the banks of this watercourse, which could be retained (see **Figures 5.1** and **5.2**).

5.6 Assessment of Effects

The assessment of effects from the construction and operational phases of the Project considers the following:

- Direct construction effects: loss of areas of forest through woodland removal to create the Proposed Development substation site, ancillary infrastructure and access, and the Associated Development alignment OHL OC and access, in the context of the regional forest resource for both commercial conifer forest and ancient woodland and semi-natural woodlands;
- Indirect construction effects: increased windthrow and secondary felling agreed with landowners;
- Indirect operational effects: effects on forest management systems and restrictions on forest access; and
- Cumulative effects: combined loss of woodland from direct and indirect (secondary) felling.

The Proposed Development (Substation)

Construction Effects

Woodland Removal

The total loss of woodland resulting from the Proposed Development has been calculated using the project Geographic Information System (GIS) and equates to 3.86 ha, assuming broadleaf removal is also required as outlined in paragraph 1.5.2. However, 1.81 ha of trees will be replanted within the RLB as per the landscape planting plan (see **Annex E**) and 2.05 ha of trees will be replanted off-site as part of the compensatory planting management strategy (see Annex I) which will offset the total net loss of woodland. If broadleaf removal of 0.13 ha is not required, then the woodland removal figure would equate to 3.73 ha, and accordingly, the replanting within the RLB would be amended to 1.68 ha while the off-site compensatory figure remains at 2.05 ha.

The woodland removal for the Proposed Development consists mainly of young commercial conifer plantation. The removal of thicket and pre-thicket conifers has been assessed as having a high magnitude of change but a negligible sensitivity, meaning that the effect is minor and not significant.

Table 5.4 below sets out the woodland characteristics of the area affected by the Proposed Development.

Table 5.4 Woodland characteristics of the area affected by the Proposed Development

Habitat Type	Area (ha)
Coniferous plantation (2-3-year-old and 5-6-year-old restock) - within RLB and new and existing access track corridors	3.73
Broadleaved semi-natural woodland – within RLB, 33kV and existing access track corridor	0.13
Total (including broadleaf removal)	3.86

Windthrow

The windthrow risk impact of the main area of woodland removal for the substation site is generally low, due to the woodland characteristics of young conifer plantation with areas of open ground (see **Figures 5.1** and **5.2**). During the construction and tree felling/vegetation clearance required for the Project the effects in terms of windthrow will therefore be minimal. This includes the clearance for new permanent access tracks (295m southeast of the substation site), and 280m to the west, connecting into the substation itself and to the SuDS pond). The former cuts through the Sitka spruce pre-thicket, while the substation access cuts through the 2-3-year-old Sitka spruce restock encompassed by the RLB. **Figures 5.1** and **5.2** illustrate of these tracks. The windthrow effect resulting from the construction of the Proposed Development is assessed as none and not significant.

Operational Effects

Woodland Removal

There may be requirements for routine vegetation clearance and management along the access tracks (see **Figures 5.1** and **5.2**) and immediately adjacent to the substation to facilitate clear, safe access for operation and maintenance works. Overall, the effects during operation of the Proposed Development are assessed as none and not significant.

It is worth recognising that there is potential to maintain biodiversity within the RLB of the Proposed Development. As seen above, there is a total area of 0.13 of native broadleaves which could be retained. An area of 0.07 ha at the north-western edge of the RLB connects to a wider riparian corridor covering an area of approximately 0.77 ha. Riparian corridors are important for several reasons, some of which include creating wildlife corridors, reducing the risks of erosion on banks, and maintaining a stable water environment. Retaining these trees would provide continued valuable habitat for flora and fauna.

Effects on Forest Management Systems

The introduction of a new overhead line through areas of managed forest would require a review by the landowner of their existing management system. Most large State-owned commercial forest areas have a Land Management Plan (LMP), which identifies the operations intended for the ongoing management of the forest over a 20-year period. This LMP also provides the forest owner with consents from Scottish Forestry, as the forest authority, to undertake felling and replanting of the forest over a 10-year period. The impact of the Proposed Development is therefore only in terms of individual LMPs having to be revised to address the construction of the Proposed Development and the associated tree clearance works on the future management of the site.

It is, however, anticipated that the Proposed Development will have low impacts on local forest management systems, in terms of individual LMPs having to be revised to address the construction of the Proposed Development, and any future tree clearance or management of the site to ensure safe access to and operation of the Proposed Development. The sensitivity of the management system to revision is considered to be low. The magnitude of change associated with restructuring the LMP to incorporate the felling required for the Proposed Development could be considered, locally or for the individual landowner of medium magnitude, as the site walkover identified the area is under standard forestry management (clear-fell and restock). Additionally, there is no risk of windthrow resulting from the felling for the Proposed Development. Together, this suggests that the impacts locally and on the individual landowner is likely minor and not significant.

Restrictions on Forest Access

At the time of tree harvesting, the forestry industry has a range of operations, some of which can be restricted by the presence of an overhead line or the proximity to the substation. Live electrical overhead lines provide a number of risks in terms of tree felling and extraction of the timber to the roadside near the OHL. Loading and haulage of the timber off-site can also be restricted within proximity of live electrical equipment. However, the substation site and the RLB will be replanted not with commercial forestry, but with native broadleaves (see

Figure 5.4), so there will be no requirement for future access into the immediate site for commercial forestry purposes, although access for maintenance to the new plantations will be required. The adjacent commercial forestry will lie approximately 140 m away from the proposed new substation (although immediately adjacent to the 33kV interconnector cable).

The Proposed Development site will be replanted with native broadleaves (see **Figure 5.4**) which means there will be a forest resource on site which will require active management. However, the risks arising from the Proposed Development associated with access for commercial forestry purposes are assessed as none and not significant.

It is assumed that planning work for any proposed future felling would follow standard health and safety management measures and best practice, e.g., Forest Industry Safety Accord (FISA)² guidelines. Overall, the impact of the Proposed Development on future forestry activities is assessed as minor and not significant.

² FISA (2022) Safety Guides <https://ukfisa.com/Safety/Safety-Guides>

The Associated Development (OHL Alignment and Operational Corridor)

Construction Effects

Woodland Removal

The total loss of woodland resulting from the Associated Development has been calculated using the project Geographic Information System (GIS) and equates to an area of 6.67 ha. The full management felling area, (a term which refers to carrying out additional tree felling outside the relevant development boundary to secure green, windfirm edges and as such helping to reduce the risks of windthrow in the retained crop. Mature trees are more at risk of windthrow, especially after being exposed), is 9.41 ha. This management felling area of 9.41 ha will be replanted with commercial conifers as part of the landowner felling licence/LMP conditions. This, combined with 6.67 ha of off-site tree planting as part of the compensatory planting management strategy (see Annex I) will offset the total net loss of woodland. The removal of thicket and pre-thicket conifers and young conifer restock has been assessed as having a high magnitude of change but a negligible sensitivity, and the effect is therefore minor and not significant. The removal of semi-mature conifer plantation has been assessed as having a medium magnitude of change and a low sensitivity (taking into consideration that the management felling area will be replanted), and the effect is therefore, again, minor and not significant.

There is also potential to manage species-rich areas of lower growing vegetation within the OC, to provide medium or long-term biodiversity enhancement. Lower growing shrubs would provide valuable habitat for local fauna and flora. The assessment of this effect is provided in **Chapter 4 Ecology and Ornithology**.

Table 5.5 below sets out the woodland characteristics of the area affected by the Associated Development.

Table 5.5 Woodland characteristics (Associated Development).

Habitat Type	Area (ha)
Coniferous plantation (30-35-year-old semi-mature) - within 85m OC	3.56
Coniferous plantation (10-year-old fir and pine mix with broadleaf regeneration)	1.62
Coniferous plantation (2-3-year-old and 5-6-year-old restock)	0.76
Coniferous plantation (pre-thicket)	0.61
Coniferous plantation (pre-thicket) within permanent access track	0.12
Total (excluding management felling area)	6.67
Coniferous plantation (30-35-year-old semi-mature) - surrounding management (calculation included in Table 5.4)	9.41
Total (including management felling area)	16.08

Windthrow

The 85m corridor for the Associated Development will run through the semi-mature conifer plantation to the west and southwest of the Proposed Development, which is classed as moderately to highly exposed. Accordingly, its removal would create an increased windthrow risk of moderate to high of the adjacent, retained conifer woodland blocks. Therefore, a wider management felling coupe of 9.41 ha has been identified. This will include felling of the full block to a viable windfirm edge to mitigate the windthrow risk and the significance of the effect would therefore be minor and not significant.

Operational Effects

Woodland Removal

The operational effects on forests and woodland resulting from the Associated Development would involve periodic vegetation clearance and management to maintain the OC. Within the OC, following construction of the OHL, there would be an ongoing need to manage the growth of vegetation to facilitate access for maintenance of the overhead line and to maintain the required tree clearance zones for the safe and resilient operation of the line. The OC, after woodland removal, is deemed to be of negligible sensitivity and the impact of vegetation management is considered to represent a low magnitude of change. Overall, the adverse effect during operation is assessed as none and not significant.

Effects on Forest Management Systems

The introduction of a new overhead line through areas of managed forest would require a review by the landowner of their existing management system. Most large State owned commercial forest areas have a Land Management Plan (LMP), which identifies the operations intended for the ongoing management of the forest over a 20-year period. This LMP also provides the forest owner with consents from Scottish Forestry, as the forest authority, to undertake felling and replanting of the forest over a 10-year period. The impact of the Associated Development is therefore only in terms of individual LMPs having to be revised to address the construction of the Associated Development and the associated tree clearance works on the future management of the site.

It is, however, anticipated that generally, the Associated Development will have low impacts on local forest management systems, in terms of individual LMPs having to be revised to address the tree felling required for the OHL alignment OC, the associated management felling to mitigate windthrow, and any future tree clearance or management of the site to ensure safe access to and operation of the Associated Development. The sensitivity of the management system has been assessed as likely to be moderate. The magnitude of change associated with restructuring the LMP to incorporate the felling required for the Associated Development will also likely be moderate. Together, this suggests that the impacts locally and on the individual landowner from the Associated Development is likely moderate and significant.

Restrictions on Forest Access

At the time of tree harvesting, the forestry industry has a range of operations, some of which can be restricted by the presence of an overhead line. Live electrical overhead lines provide a number of risks in terms of tree felling and extraction of the timber to the roadside near the OHL. Loading and haulage of the timber off-site can also be restricted within proximity of live electrical equipment. The adjacent forestry once restocked will be approximately 42.5m away from the proposed new OHL realignment, and again, it is assumed that standard health and safety measures and FISA guidelines standard health and safety management measures and best practice, e.g., FISA guidelines will be followed during planning. The risk of the Associated Development to future forestry activities is therefore assessed as none and not significant.

5.6.1 Cumulative Assessment

The Proposed Development and the Associated Development

Woodland Removal

The Proposed and Associated Developments will involve clearing a total of 10.53 ha of young conifer plantation and native broadleaf regeneration. However, much of the RLB will be planted up with native broadleaves (see **Figure 5.4**), and in combination with off-site planting, the total net loss of woodland will be nil. The cumulative effect is assessed to have a moderate to high magnitude of change, but a negligible sensitivity due to the nature of second rotation commercial forestry. There may be minor, indirect effect on the wider woodland resource (outside the RLB) during construction as the woodland is cleared, and during operation as the new non-commercial plantation is managed, but overall, the effect is assessed as minor, short-term, and not significant. A breakdown of woodland removal can be seen in **Figure 5.1** (see **Figure 5.2** for aerial view).

Windthrow

In forestry there is a general commitment to fell to viable (green) windfirm edges to minimise the risk of windthrow to retained crops. This is contrary to felling a linear 85 m wide OC, as this will expose trees that were previously sheltered, and hence increase the risk of windthrow to the retained crop. It is therefore recommended that the semi-mature Sitka spruce block is felled to a windfirm green edge as part of the Associated Development (this equates to an additional 9.41 ha of felling outside the Project boundary). The resulting cumulative risk of windthrow to the site is therefore assessed as none and not significant.

Forest Management

Engagement with the landowner Forestry and Land Scotland (FLS) has been undertaken to review and discuss the Project felling and wider management felling proposals in achieving a windfirm woodland felling boundary. The expectation is that the wider management felling area will be replanted as a commercial conifer woodland. Continued management liaison will be undertaken for the duration of the Project between the Applicant and the Landowner.

5.7 Mitigation

Mitigation During Construction

No significant effects are predicted based on the area of woodland removal proposed for the construction of the Proposed Development, however in terms of the Associated Development, mitigation should include felling of the semi-mature conifer plantation to a windfirm edge, meaning that a total of approximately 16.08 ha will be felled. The forest outside the OC will then be replanted with commercial forestry, which will eventually develop a green windfirm edge. This, alongside standard good practice working methods will ensure that significant effects on ecological and hydrological receptors and the wider forest resource are avoided.

The site has 0.13 ha of native broadleaf woodland which could be retained. All other loss of woodland should be fully compensated through a Compensatory Planting Scheme (**see Annex I**).

In order to address the potential significant effect on forest land-use management, the Applicant has produced a Woodland Report (An Suidhe Substation Woodland Report, see **Annex I**) which identifies all areas of felling required for the Proposed and Associated Developments. These reports will also be reviewed by the landowner to link in with the site's LTFP. It is crucial that the proposed felling operations comply with UKFS guidelines as this forms part of the SF approval process. This approval is required before any of the proposed felling can be carried out. In addition, the Woodland Report aims to reduce the risk of future windthrow by identifying viable windfirm edges (outside the RLB and/or OHL OC). Any additional felling as identified in the Woodland Report will require joint working with the landowner to deliver felling and restocking in these areas. The An Suidhe Substation Woodland Report recommended that an additional 9.41 ha of semi-mature Sitka spruce is felled adjacent to the OC, to achieve a windfirm edge.

Mitigation During Operation

The Applicant is fully committed to meeting the Control of Woodland Removal Policy (CoWRP) objectives set out by the Scottish Government. The primary objective of this is no net loss of woodland resulting from the development. This will be achieved through a Compensatory Planting Scheme which will involve agreements with landowners within the Argyll and Bute local authority area. Similarly, the Applicant is prepared to work with landowners as set out in the Woodland Report for the property, to address the potential effect on LTFPs or management systems.

No further operational mitigation measures have been identified.

5.8 Appraisal Summary

This chapter has considered the potential for significant effects on the forest resource, forest management and access during construction and operation. According to Argyll and Bute Woodland and Forestry Strategy the loss

of woodland associated with the Proposed and Associated Developments would equate to 0.007% of the commercial plantation resource.

The loss of woodland required to facilitate the proposed development has been assessed as having a low magnitude of change. This was based on the context of the regional resource and the low sensitivity of the type of woodland present within the RLB. In terms of mitigation for woodland loss, it has been deemed acceptable that woodland loss will be recovered through a compensatory planting scheme. The management felling of semi-mature coniferous plantation required to facilitate the Associated Development OHL tie-in OC has been assessed to have a moderate significance of effect, owing to the potentially onerous task of restructuring the LTFFP for the area, which will fall on the landowner. To mitigate this, the Applicant shall liaise with the landowner regarding replanting and future management.

A summary of the appraisal of forestry is provided in **Table 5.6** below.

Table 5.6 Appraisal of Forestry.

Environmental Feature	Development Interaction	Mitigation Measures	Receptor Sensitivity	Magnitude of effect	Significance of effect
Coniferous plantation (restock)	Mulch	Compensatory planting	Low	Low	None
Coniferous plantation (semi-mature)	Clear-fell	Replanting (in liaison with landowner)	Low	High	Moderate

5.9 Mitigation Proposals

The key mitigation measures considered to reduce the potential effects of the Project are described in **Table 5.7**.

Table 5.7 Mitigation Summary.

Topic	Mitigation Measure	Responsible
Forestry	Compensatory Planting Scheme (to ensure no net loss of woodland)	The Applicant
Forestry	Replanting Scheme (management felling area)	The Landowner

TRANSMISSION

Appraisal & Mitigation of Forestry Landscape Impacts

An Suidhe Substation Proposed & Associated Development Felling

Created by: Danielle Dunnagan
Contractor: Scottish Woodlands Ltd.
Created on: 29/11/2022

Proposed Development Felling

- Mixed Broadleaves
- Young conifer restock
- Young conifer restock in permanent access track

Associated Development Felling

- Temporary Peat Storage Area
- Pre-Thicket Sitka Spruce
- Pre-Thicket Sitka Spruce in proposed OHL OC
- Young conifer restock in Proposed OHL 85m OC
- Deer fenced Douglas fir & Scots pine restock
- 30-35-year-old Sitka spruce within 85m OC
- Management felling of Sitka spruce outwith OC
- Windblow

SSE Argyll Substation Design Data


- 33kV Interconnector Cable Route
- Downloads
- Existing Access Tracks
- Permanent Access Tracks
- Proposed OHL Alignment
- SuDS Outfall
- SuDS Pond
- Substation Platform
- Temporary Access Tracks
- Temporary Works Area
- An Suidhe To Crossaig Access Tracks
- Proposed 85m operational corridor
- 33kV interconnector cable 10m corridor
- Permanent access track 20m corridor
- Town & Country Planning Boundary

Scottish Woodlands Ltd.
Research Park, Riccarton,
Edinburgh, EH14 3AP

0 100 200 m

Scale 1:10,000
Scale correct at A4

Crown copyright and database rights 2022
Ordnance Survey 100030835

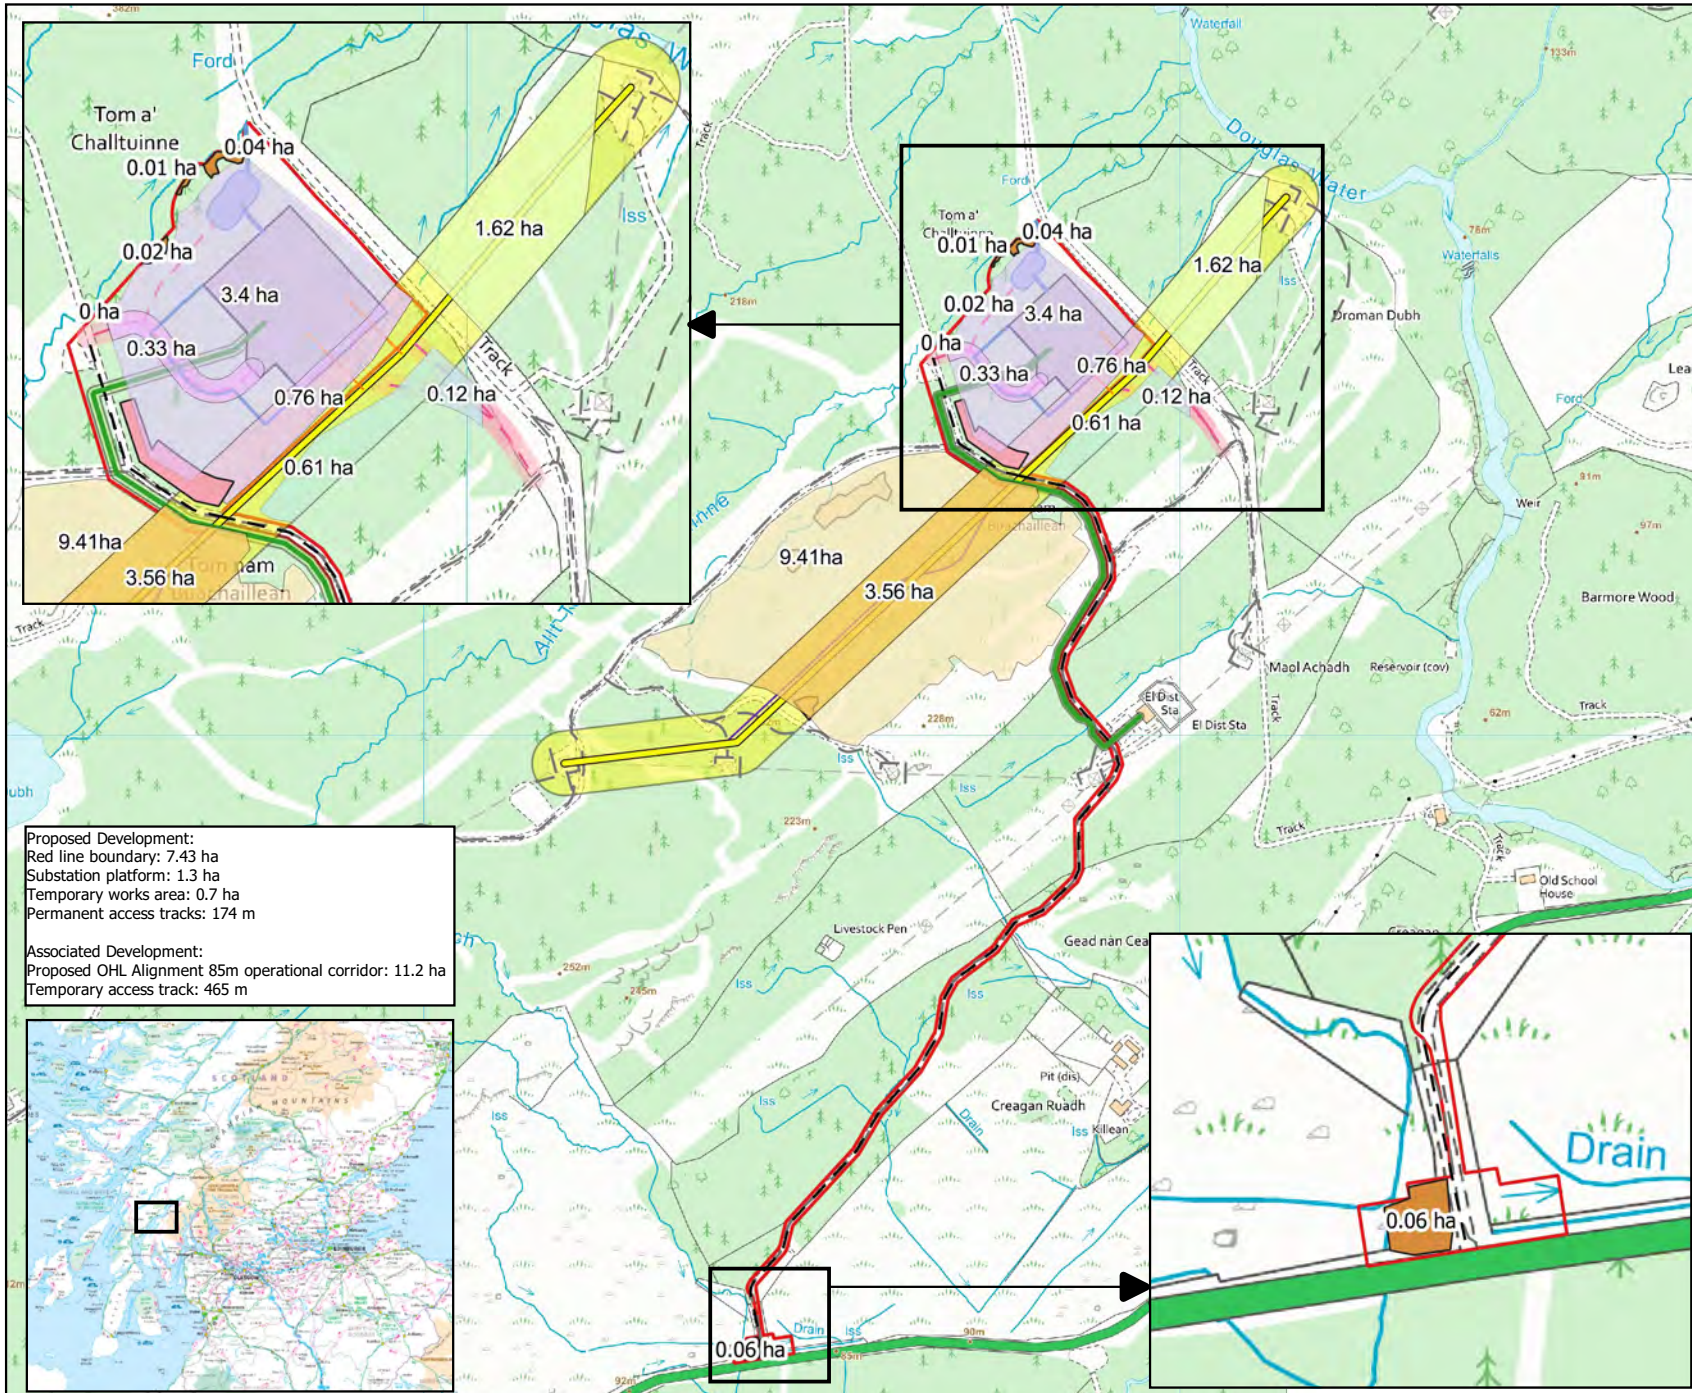

Proposed Development:
Red line boundary: 7.43 ha
Substation platform: 1.3 ha
Temporary works area: 0.7 ha
Permanent access tracks: 174 m

Associated Development:
Proposed OHL Alignment 85m operational corridor: 11.2 ha
Temporary access track: 465 m

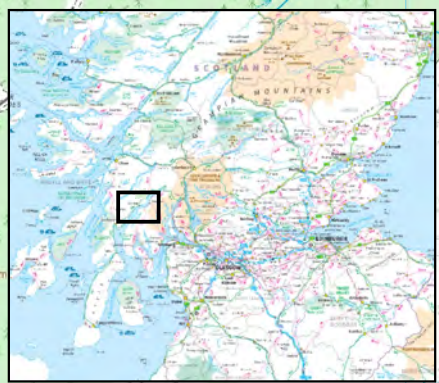


Figure 5.1

TRANSMISSION

Appraisal & Mitigation of Forestry Landscape Impacts

An Suidhe Substation Proposed & Associated Development Felling

Created by: Danielle Dunnagan
Contractor: Scottish Woodlands Ltd.
Created on: 29/11/2022

Proposed Development Felling

- Mixed Broadleaves
- Young conifer restock
- Young conifer restock in permanent access track


Associated Development Felling

- Temporary Peat Storage Area
- Pre-Thicket Sitka Spruce
- Pre-Thicket Sitka Spruce in proposed OHL OC
- Young conifer restock in Proposed OHL 85m OC
- Deer fenced Douglas fir & Scots pine restock
- 30-35-year-old Sitka spruce within 85m OC
- Management felling of Sitka spruce outwith OC
- Windblow

SSE Argyll Substation Design Data


- 33kV Interconnector Cable Route
- Downloads
- Existing Access Tracks
- Permanent Access Tracks
- Proposed OHL Alignment
- SuDS Outfall
- SuDS Pond
- Substation Platform
- Temporary Access Tracks
- Temporary Works Area
- An Suidhe To Crossaig Access Tracks
- Proposed 85m operational corridor
- 33kV interconnector cable 10m corridor
- Permanent access track 20m corridor
- Town & Country Planning Boundary

Scottish Woodlands Ltd.
Research Park, Riccarton,
Edinburgh, EH14 3AP



Scale 1:10,000
Scale correct at A4

Crown copyright and database rights 2022
Ordnance Survey 100030835

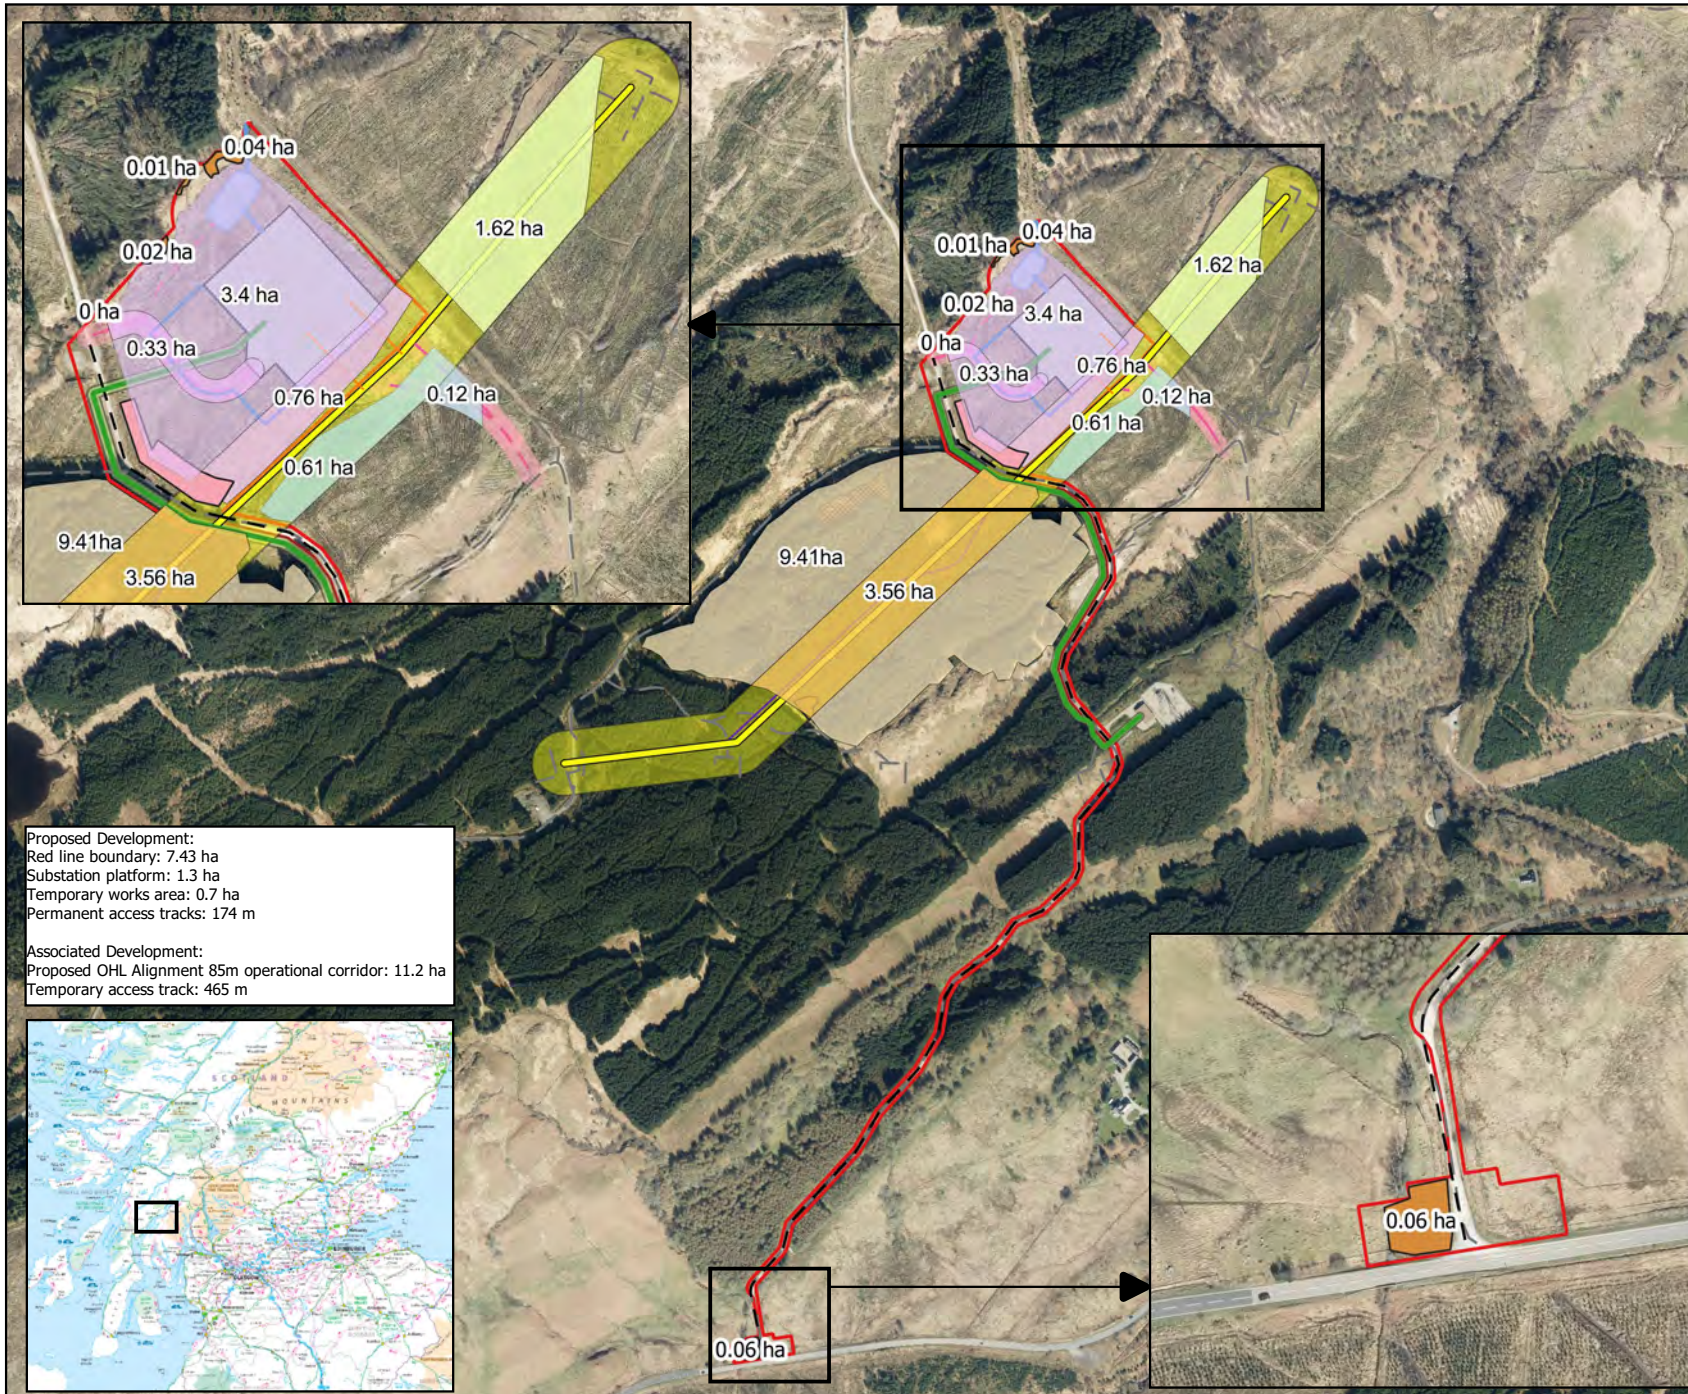

Proposed Development:
Red line boundary: 7.43 ha
Substation platform: 1.3 ha
Temporary works area: 0.7 ha
Permanent access tracks: 174 m

Associated Development:
Proposed OHL Alignment 85m operational corridor: 11.2 ha
Temporary access track: 465 m

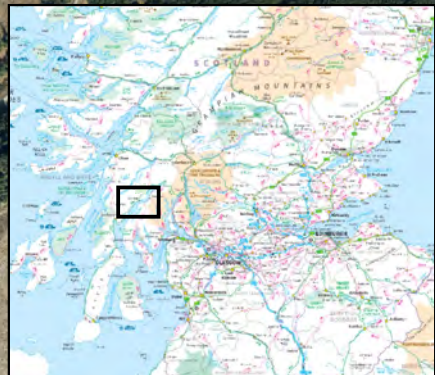


Figure 5.2

TRANSMISSION

Appraisal & Mitigation of Forestry Landscape Impacts

An Suidhe Substation Plates

Created by: Danielle Dunnagan
Contractor: Scottish Woodlands Ltd.
Created on: 29/11/2022

Proposed Development Felling

- Mixed Broadleaves
- Young conifer restock
- Young conifer restock in permanent access track


Associated Development Felling

- Temporary Peat Storage Area
- Pre-Thicket Sitka Spruce
- Pre-Thicket Sitka Spruce in proposed OHL OC
- Young conifer restock in Proposed OHL 85m OC
- Deer fenced Douglas fir & Scots pine restock
- 30-35-year-old Sitka spruce within 85m OC
- Management felling of Sitka spruce outwith OC
- Windblow

SSE Argyll Substation Design Data

- 33kV Interconnector Cable Route
- Downleads
- Existing Access Tracks
- Permanent Access Tracks
- Proposed OHL Alignment
- SuDS Outfall
- SuDS Pond
- Substation Platform
- Temporary Access Tracks
- Temporary Works Area
- An Suidhe To Crossaig Access Tracks
- Proposed 85m operational corridor
- 33kV interconnector cable 10m corridor
- Permanent access track 20m corridor
- Town & Country Planning Boundary

Scottish Woodlands Ltd.
Research Park, Riccarton,
Edinburgh, EH14 3AP



Scale 1:10,000
Scale correct at A4

Crown copyright and database rights 2022
Ordnance Survey 100030835

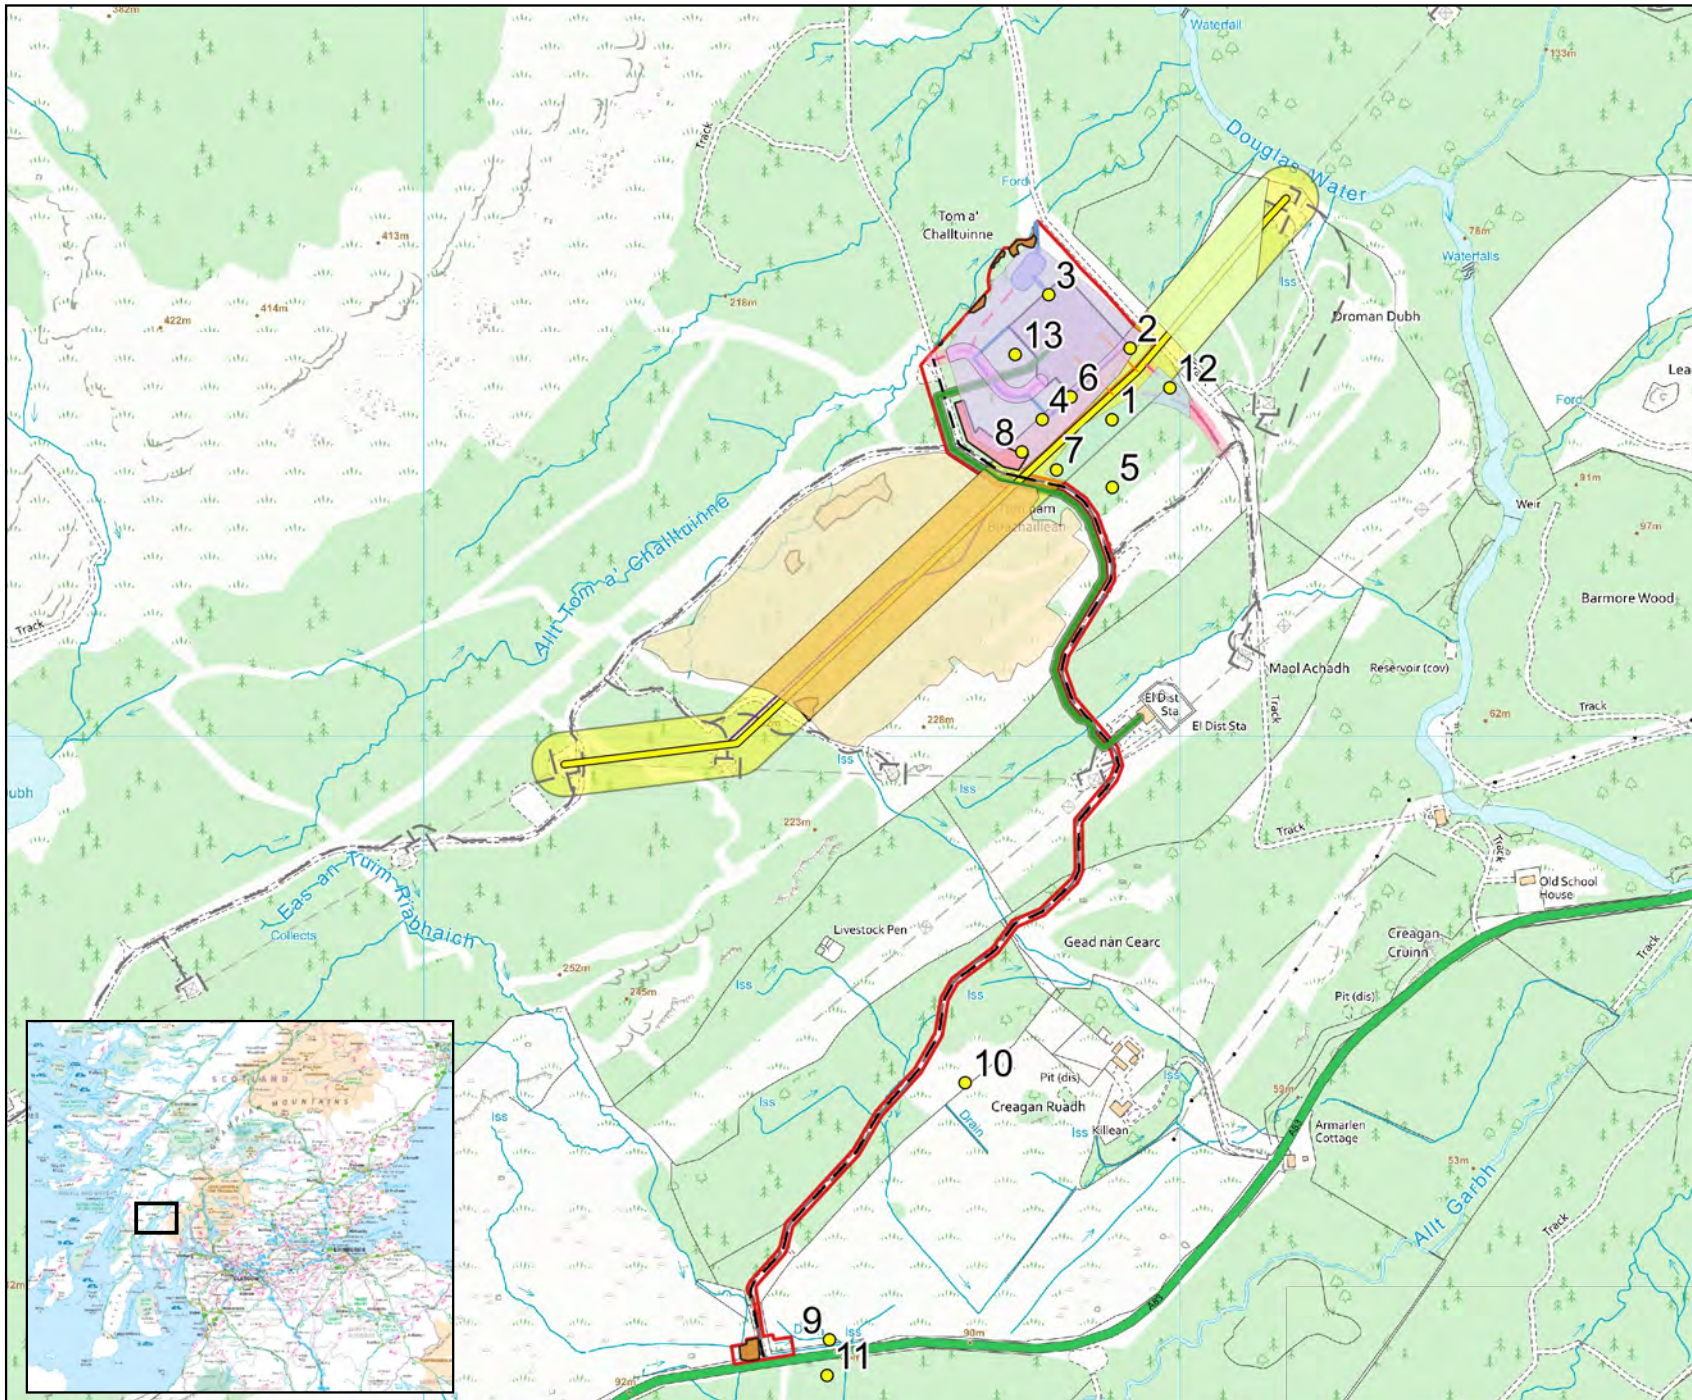


Figure 5.3





TRANSMISSION

Appraisal & Mitigation of Forestry Landscape Impacts














An Suidhe Substation Compensatory Planting


Created by: Danielle Dunnagan
Contractor: Scottish Woodlands Ltd.
Created on: 30/11/2022

Compensatory Planting

-  Native Scrub Mix
-  Native Wet Woodland
-  Wet Meadow
-  Wet Meadow Access Tracks

SSE Argyll Substation Design Data

-  33kV Interconnector Cable Route
-  Downloads
-  Existing Access Tracks
-  Permanent Access Tracks
-  Proposed OHL Alignment
-  SuDS Outfall
-  SuDS Pond
-  Substation Platform
-  Temporary Access Tracks
-  Temporary Works Area
-  An Suidhe To Crossaig Access Tracks
-  Proposed 85m operational corridor
-  Town & Country Planning Boundary

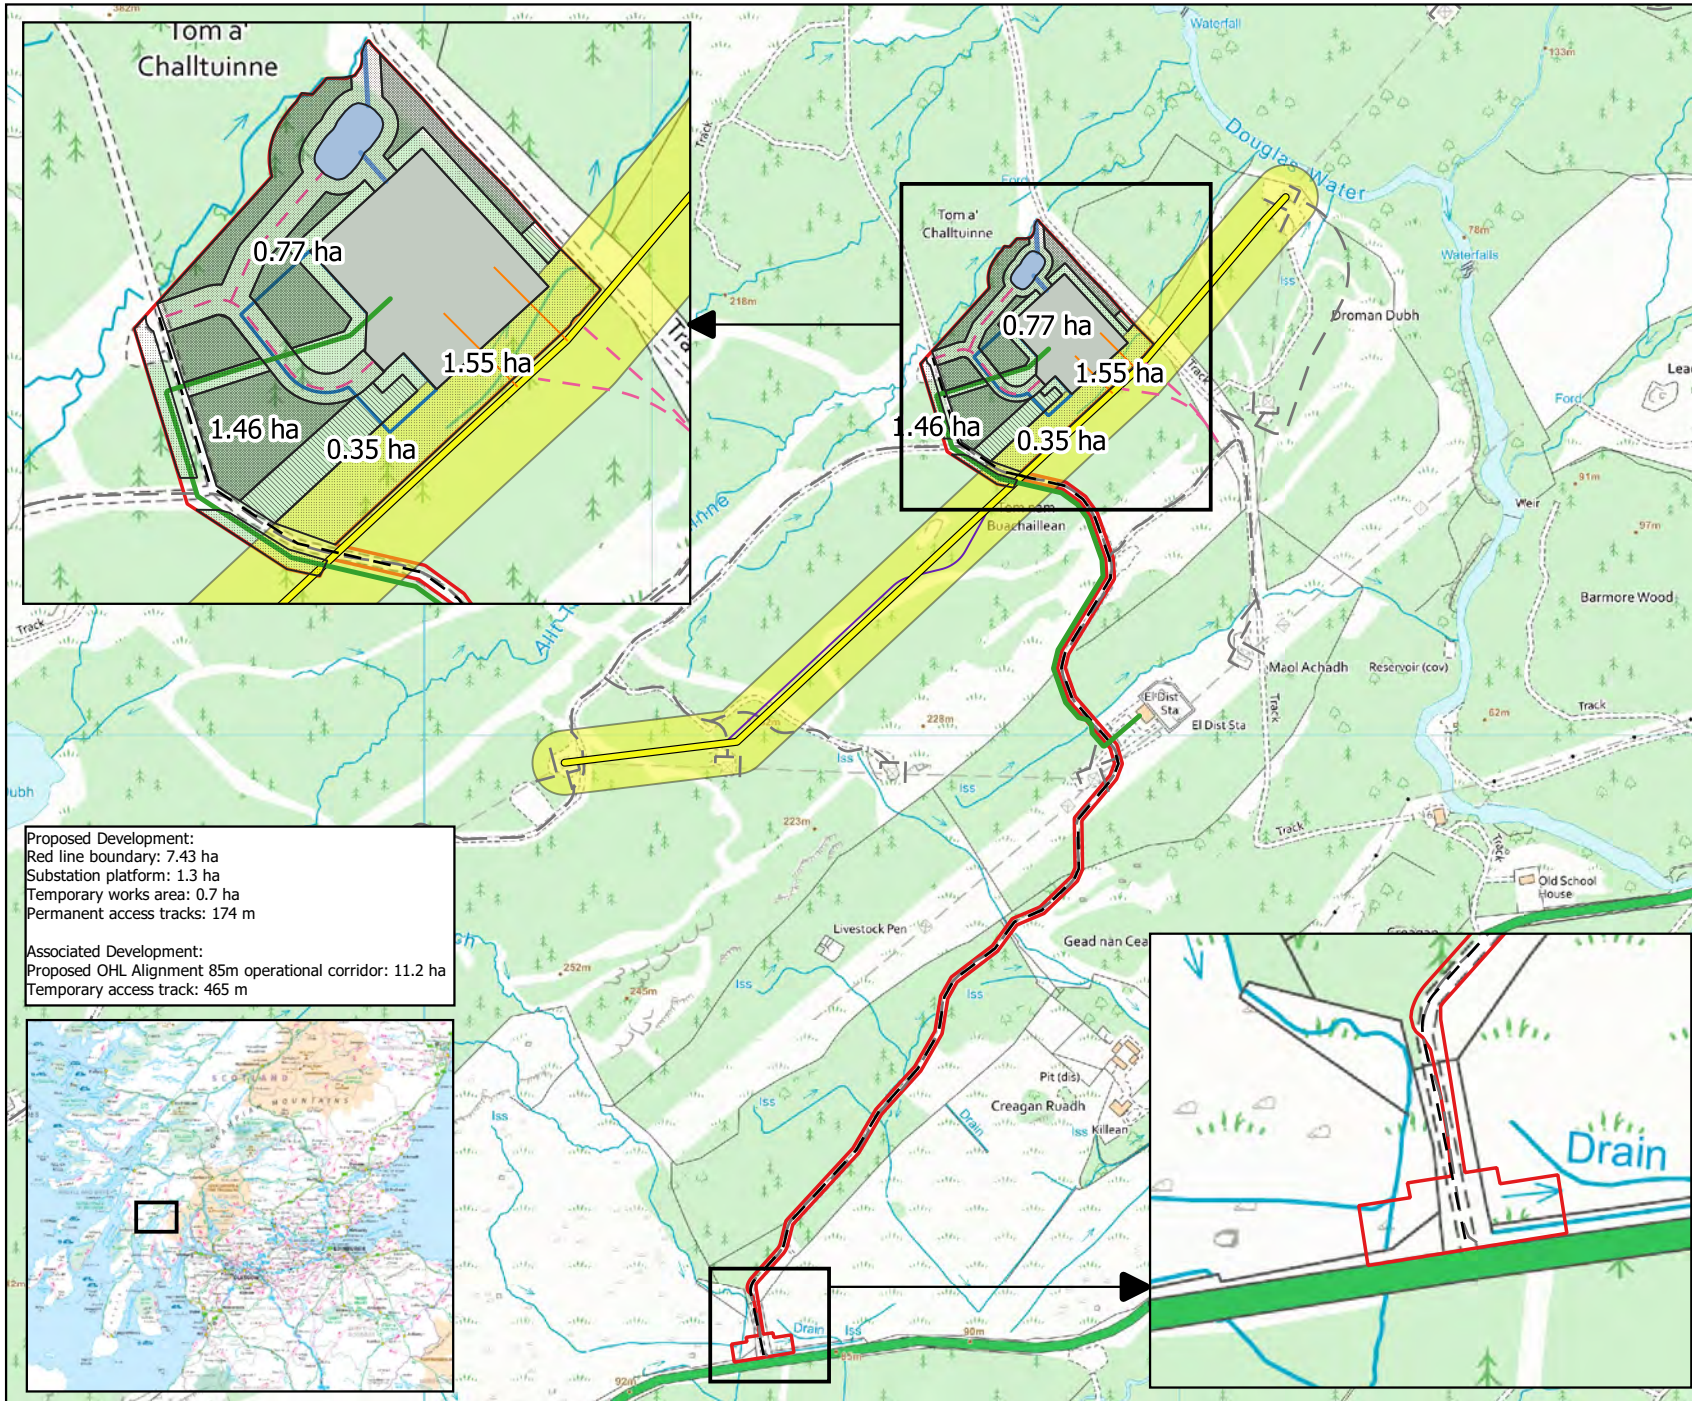

Proposed Development:
Red line boundary: 7.43 ha
Substation platform: 1.3 ha
Temporary works area: 0.7 ha
Permanent access tracks: 174 m

Associated Development:
Proposed OHL Alignment 85m operational corridor: 11.2 ha
Temporary access track: 465 m

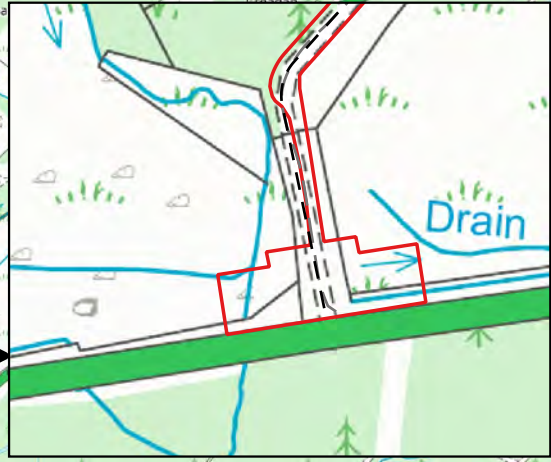


Figure 5.4